

# PT460E Series Pressure Sensors

*SIMPLE INSTALLATION,  
REPEATABILITY AND RELIABILITY*



## Description

The Dynisco PT460E Series transducer is a  $\pm 0.5\%$  sensor ideal for melt pressure applications requiring simple installation, repeatability and reliability. The PT460E transducers provide the industry standard 3.33 mV/V signal designed to work with most pressure indicators. The PT460E comes equipped with a six pin bendix connector. Optional thermocouple or RTD configurations are available to provide melt temperature. The PT460E features a 1/2-20 UNF thread for installation in standard transducer mounting holes and can be supplied with a variety of other electrical connections if desired.


## Features

- Accuracy better than  $\pm 0.5\%$
- DyMax® coated stainless steel wetted parts
- Proven sensor design
- 0 - 500 to 0 -30,000 psi
- Internal 80% shunt calibration

Performance Characteristics	
Combined Error:	±0.5% FSO, (Including Linearity, Repeatability & Hysteresis)
Repeatability:	±0.2% FSO
Over Pressure:	2 x FSO or 35,000 psi (whichever is less)
Configuration:	Four active arm bonded Wheatstone bridge strain gage
Bridge Resistance:	Input: 345 Ohms minimum; Output: 350 Ohms ±10%
Output:	3.33 mV/V ±2.0%
Zero Balance:	±10% full scale
Input Voltage:	10 Vdc recommended, 12 Vdc maximum
Internal Shunt Calibration (R-Cal):	80% FSO ±1.0%
Insulation Resistance:	1,000 megohms at 50 Vdc

Temperature & Mechanical Characteristics	
<b>Transducer Diaphragm:</b>	
Maximum Diaphragm Temperature:	750°F (400°C)
Zero Shift (due to temperature change):	25 psi/100°F maximum (45 psi/100°C)
<b>Electronics Housing:</b>	
Maximum Temperature:	250°F (121°C)
Zero Shift (due to temperature change):	±0.05% full scale/°F maximum (±0.10% full scale/°C)
Sensitivity Shift (due to temperature change):	±0.02% full scale/°F maximum (±0.04% full scale/°C)
Mounting Torque:	500 inch/lbs. maximum
Standard Wetted Parts:	Dymax® coated 15-5 PH SST

## Ordering Guide for PT460E Series

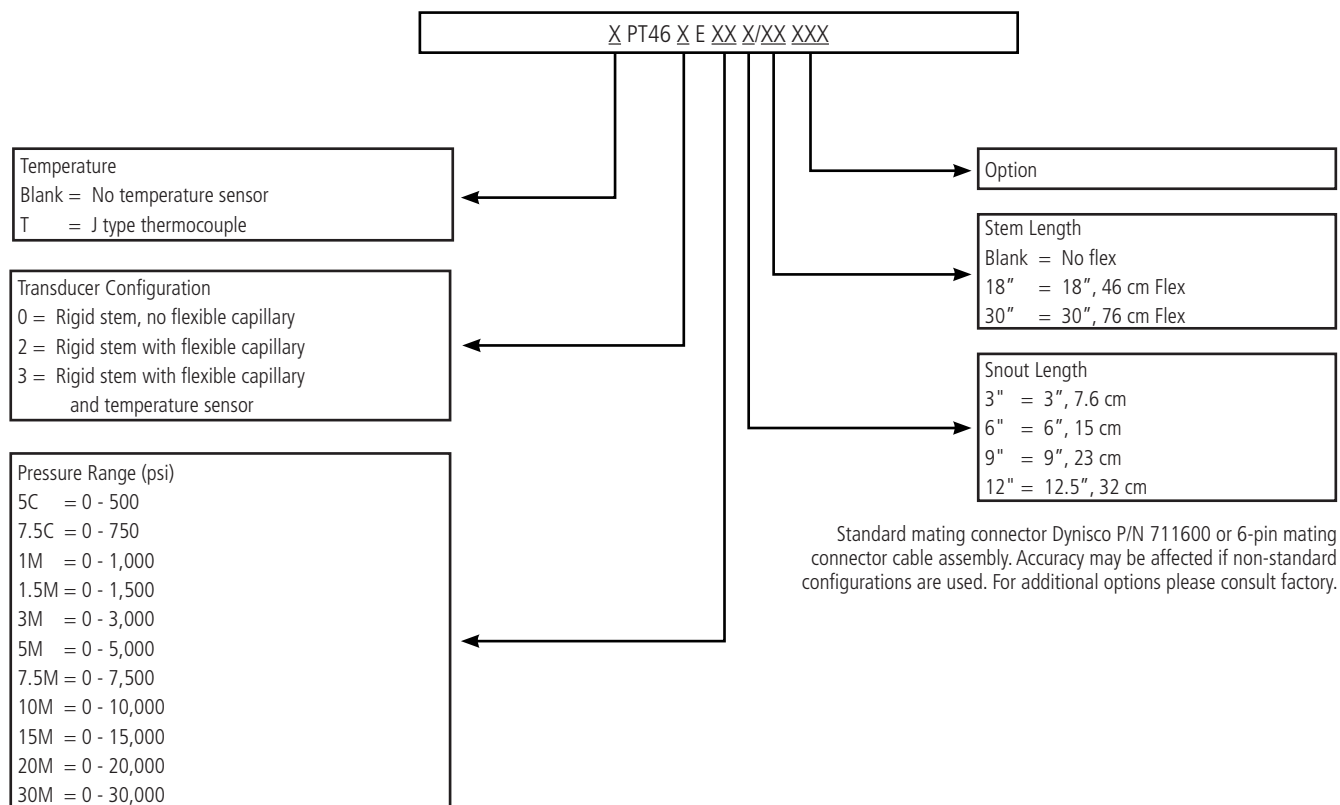

# Dimensions

CONNECTOR WIRING	
PIN	FUNCTION
A	SIGNAL +
B	SIGNAL -
C	EXCITATION +
D	EXCITATION -
E	INTERNAL CAL RESISTOR
F	

NOTES  
1. DIMENSIONS ARE IN INCHES (MILLIMETERS)

